

BACKBAR SERIES

SKOPE®

Premium Range

Display / Beverage

These stylish horizontal chiller cabinets with an external evaporator offer you more internal space than any other, saving you re-stocking time and giving you more selling time.

Options

R/H Services
S/S Countertop
Additional shelves
Door lock kit

Double Low/E Argon
Heated glass (swing
door only)
Swing/sliding doors



Warranty
2 year protection




High Energy
Efficiency

High Energy
Efficiency models available


Specifications

Backbar Series


Display / Bottom Mount

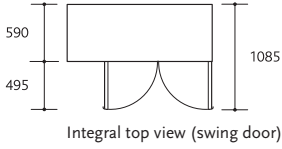


Integral top view (swing door)




Integral front elevation




Remote front elevation

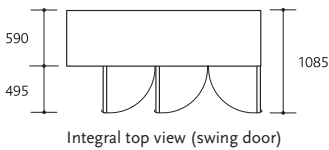


Integral top view (swing door)




Integral front elevation




Remote front elevation

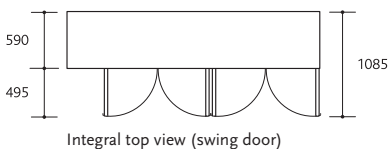

Integral top view (swing door)



Integral front elevation



Remote front elevation

BB380 - SOLID/GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	
BB380 2SW	148	Integral	Chiller	Gross Volume 380 litres Total Shelf Area 1.32m ² (including floor) Floor Area 0.89m ² (integral sw.) 0.89m ² (integral sl.) 0.80m ² (remote sw.) 0.81m ² (remote sl.)
BB380r 2SW	118	Remote	Chiller	
BB380 2SL	150	Integral	Chiller	
BB380r 2SL	120	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*		920	920	758
Width		1500	1355	1020
Depth 1		590 (swing)	590 (swing)	530
Depth 2		596 (sliding)	596 (sliding)	

BB380
2 DOOR

- 13.85 MEPS (kWh/24h/m²)
- BB380r 2SW remote refrigeration duty 480 Watts at -5°C SST
- BB380r 2SL remote refrigeration duty 528 Watts at -5°C SST
- +1°C to +4°C in 40°C ambient (swing door only)
- +1°C to +4°C in 32°C ambient (sliding door only)

BB580 - SOLID/GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	
BB580 3SW	188	Integral	Chiller	Gross Volume 580 litres Total Shelf Area 2.04m ² (including floor) Floor Area 1.22m ² (integral sw.) 1.23m ² (integral sl.) 1.13m ² (remote sw.) 1.14m ² (remote sl.)
BB580r 3SW	158	Remote	Chiller	
BB580 3SL	190	Integral	Chiller	
BB580r 3SL	160	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*		920	920	758
Width		2060	1915	1580
Depth 1		590 (swing)	590 (swing)	530
Depth 2		596 (sliding)	596 (sliding)	

BB580
3 DOOR

- 11.76 MEPS (kWh/24h/m²)
- BB580r 3SW remote refrigeration duty 580 Watts at -5°C SST
- BB580r 3SL remote refrigeration duty 638 Watts at -5°C SST
- +1°C to +4°C in 40°C ambient (swing door only)
- +1°C to +4°C in 32°C ambient (sliding door only)

BB780 - SOLID/GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	
BB780 4SW	227	Integral	Chiller	Gross Volume 780 litres Total Shelf Area 2.79m ² (including floor) Floor Area 1.55m ² (integral sw.) 1.56m ² (integral sl.) 1.46m ² (remote sw.) 1.48m ² (remote sl.)
BB780r 4SW	197	Remote	Chiller	
BB780 4SL	229	Integral	Chiller	
BB780r 4SL	199	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*		920	920	758
Width		2620	2475	2140
Depth 1		590 (swing)	590 (swing)	530
Depth 2		596 (sliding)	596 (sliding)	



BB780
4 DOOR

- 7.19 MEPS (kWh/24h/m²)
- BB780r 4SW remote refrigeration duty 750 Watts at -5°C SST
- BB780r 4SL remote refrigeration duty 825 Watts at -5°C SST
- +1°C to +4°C in 40°C ambient (swing door only)
- +1°C to +4°C in 32°C ambient (sliding door only)

*Height excludes castors (95-110mm) or legs (150-180mm)

SKOPE®

BACKBAR X™

Combining great looks with the latest energy savings and cooling performance technology, BackBar X cabinets make a stylish addition to any bar.

**Refreshed.
Reworked.
Redesigned.**

Bar refrigeration has never looked so good

The BackBar series has undergone a facelift. The newly designed BackBar X features a sharper, seamless louvre blade design, while the doors have been upgraded to energy efficient, frameless glass, featuring new anti-condensation technology, and are equipped with sleek easy grip handles.

BackBar X offers far more than cosmetic changes. In addition to quieter operation, the range offers unrivalled energy savings and advanced design features to deliver optimal cooling performance.

BACKBAR X



Ultra-modern
look



Quieter
operation



Cheaper to run



Easy servicing



Long-life
LED lights

An Exciting New Look

Ultra-Modern Look

Frameless glass doors with superior energy efficient anti-condensation technology, louvre blade design, and a new easy grip handle.

Long-Life Reliability

Solid engineering, quality materials and industrial grade powder coat finish, ensures your cabinet maintains its appearance, product durability and high performance.

Easy Servicing

BackBar X has been designed for trouble-free operation; our easy service design allows quick access for cleaning and maintenance, minimising disruption.

Maximum Cooling Performance

Serve your customers a perfectly cold beverage every time due to our cleverly designed internal airflow system.

Quieter Operation

Create a comfortable service environment with our integrated hush kit.

Long-Life LED Lights

Premium quality LED lights for effective merchandising.

Storage

More internal space for product storage, reducing re-stocking time and increasing your selling time.



With SKOPE's Adaptive Design, you get greater flexibility to reflect an individual look.

SKOPE makes it easy to integrate bar refrigeration into your establishment with many customisable options available, including LED lighting options, wall or plinth mounting, a wide range of Dulux powder coated colour finishes, pass through, or specific dimensions that can maximise your available space to boost sales.

24%*

Energy Savings

BackBar X models now provide you with a quicker rate of return, saving up to \$200 per year.

*24% less energy than the previous model. Based on 30 cents per kW, calculated using BB380X TEC - 5.811kW/24h

Significant Energy Savings



BB380X

Uses 24% less energy than the previous model

Saving \$200*
per year



BB580X

Uses 22% less energy than the previous model

Saving \$235*
per year



BB780X

Uses 14% less energy than the previous model

Saving \$197*
per year

*Based on 30 cents per kW.

BackBar X Product Range

Model No.	Description	Dimensions (mm)	Electrical Information	
		(HxWxD)	KW	Amps
Standard - Integral				
BB380X-2SW	2 door integral	920 x 1500 x 590	0.82	3.4
BB580X-3SW	3 door integral	920 x 2060 x 590	0.86	3.6
BB780X-4SW	4 door integral	920 x 2620 x 590	1.08	4.5
Tropical - Integral				
BB380XT-2SW	2 door integral	920 x 1500 x 590	0.82	3.4
BB580XT-3SW	3 door integral	920 x 2060 x 590	0.86	3.6
BB780XT-4SW	4 door integral	920 x 2620 x 590	1.08	4.5
Standard - Remote				
BB380Xr-2SW	2 door remote	920 x 1355 x 590	0.17	0.7
BB580Xr-3SW	3 door remote	920 x 1915 x 590	0.22	0.9
BB780Xr-4SW	4 door remote	920 x 2475 x 590	0.34	1.4
Tropical - Remote				
BB380XTr-2SW	2 door remote	920 x 1355 x 590	0.17	0.7
BB580XTr-3SW	3 door remote	920 x 1915 x 590	0.22	0.9
BB780XTr-4SW	4 door remote	920 x 2475 x 590	0.34	1.4

BackBar X is available in 2, 3, 4 swing door models. Available in tropical, integral and remoted, black, stainless steel and powder coated finishes. Sliding door currently not available.

BACKBAR X SERIES

Premium Range

Display / Beverage

Combining great looks with the latest energy savings and cooling performance technology, these cabinets make a stylish addition to any bar concept. The BackBar X range is designed to maximise beverage sales as well as being reliable, durable and aesthetically unique.

- Options**
- R/H Services
 - S/S Countertop
 - Additional shelves
 - Door lock kit
 - Tropical swing door
 - Pass through (rear loading)
 - Light dimmers

Significantly More Energy Efficient
than previous swing door models, saving you up to \$200 per year

Ultra-Modern Look
Frameless glass doors, new louvre blade design, and easy grip handle

Long-Life Reliability

- Updated controller with manual light switch
- Full length, LED horizontal light
- Quality materials and powder coated finish

Performance and Maintenance

- Redesigned airflow and fan blade design ensures beverages are chilled quickly and evenly
- New louvre design provides quick and easy maintenance

Integrated Hush Kit
for quieter operation, reduced by 5 dB when compared to previous model


Available In
black, white and stainless steel (additional cost applies on S/S)

Adjustable Legs and Castors
for easy installation, positioning and relocation


Castor and Leg Height
1015 - 1035mm with castors
1070 - 1100 with legs
920mm without

BB580X-3SW


Specifications BackBar X Series Display / Beverage




Integral top view




Integral front elevation




Remote front elevation

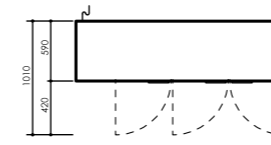


Integral top view



Integral front elevation



Remote front elevation

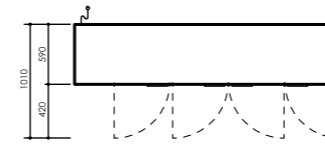

Integral top view



Integral front elevation



Remote front elevation

BB380X - SWING/GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	
BB380X-2SW	150	Integral	Chiller	Gross Volume 380 litres Total Shelf Area 1.41m ² (including floor) Floor Area 0.89m ² (integral sw.) 0.80m ² (remote sw.)
BB380Xr-2SW	120	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*		920	920	758
Width		1500	1355	1020
Depth		590	590	530

- 9.709 MEPS (kWh/24h/m²)
- BB380Xr 2SW remote refrigeration duty 480 Watts at -5°C SST
- +1°C to +4°C in 40°C ambient



BB380X
2 DOOR

BB580X - SWING/GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	
BB580X-3SW	190	Integral	Chiller	Gross Volume 580 litres Total Shelf Area 2.20m ² (including floor) Floor Area 1.22m ² (integral sw.) 1.13m ² (remote sw.)
BB580Xr-3SW	160	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*		920	920	758
Width		2060	1915	1580
Depth		590	590	530

- 11.175 MEPS (kWh/24h/m²)
- BB580Xr 3SW remote refrigeration duty 580 Watts at -5°C SST
- +1°C to +4°C in 40°C ambient



BB580X
3 DOOR

BB780X - SWING/GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	
BB780X-4SW	230	Integral	Chiller	Gross Volume 780 litres Total Shelf Area 2.98m ² (including floor) Floor Area 1.55m ² (integral sw.) 1.46m ² (remote sw.)
BB780Xr-4SW	200	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*		920	920	758
Width		2620	2475	2140
Depth		590	590	530

- 8.8 MEPS (kWh/24h/m²)
- BB780Xr 4SW remote refrigeration duty 750 Watts at -5°C SST
- +1°C to +4°C in 40°C ambient




BB780X
4 DOOR

*Height excludes castors (95-110mm) or legs (150-180mm)



Product Loading Information

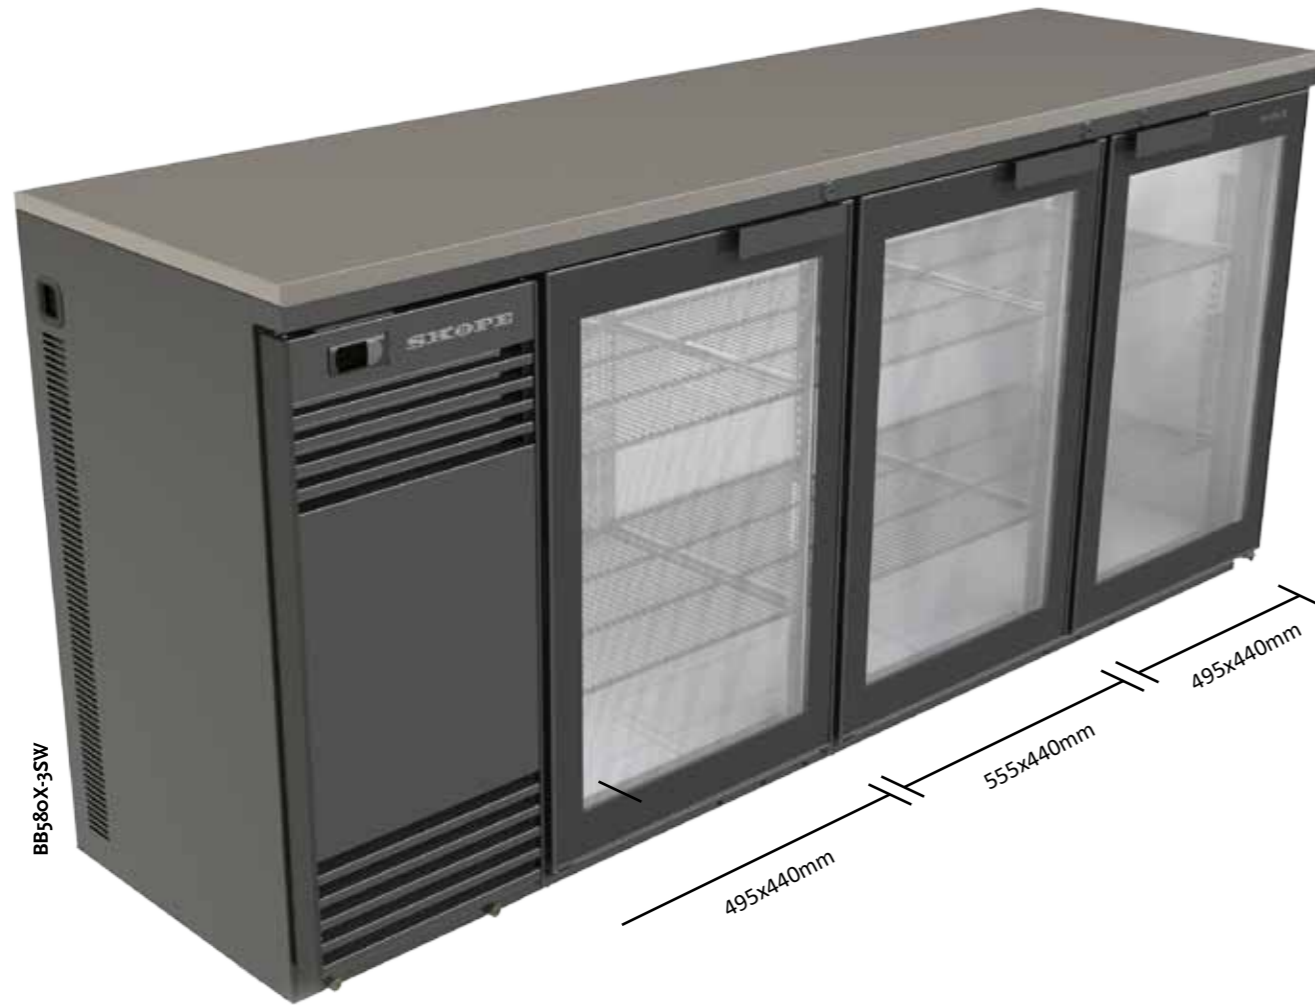

Product Load Estimate

Product Type	PET	Standard bottle	Common can size	Bottle
Volume (ml)	600ml	750ml	750ml	330ml
Height (mm)	242	310	123	227
Diameter	73	83	66	60

Shelf Loading Guide

Model	Type	Shelf Width (mm)	Shelf Depth (mm)	Number of Shelves	Products Wide	Products Deep	Total Products Per Shelf	Product Loading	
BB380X-2SW 4 Shelves supplied	600ml PET	495	440	4	6	6	36	144	Maximum load based on 2 layers of product
	750ml Bottle	495	440	4	5	5	25	100	Maximum load based on 2 layers of product
	355ml Can	495	440	4	7	6	42	420	Maximum load based on 2 layers of product (Max. of 5 layer)
	330ml Bottle	495	440	4	8	7	56	336	Maximum load based on 3 layers of product
BB380X-3SW 6 Shelves supplied	600ml PET	495	440	4	6	6	36		
		555	440	2	7	6	42	228	Maximum load based on 2 layers of product
	750ml Bottle	495	440	4	5	5	25		
		555	440	2	6	5	30	160	Maximum load based on 2 layers of product
	355ml Can	495	440	4	7	6	42		
		555	440	2	8	6	48	660	Maximum load based on 2 layers of product (Max. of 5 layer)
	330ml Bottle	495	440	4	8	7	56		
	555	440	2	9	7	63	525	Maximum load based on 3 layers of product	
BB780X-4SW 8 Shelves supplied	600ml PET	495	440	4	6	6	36		
		555	440	4	7	6	42	312	Maximum load based on 2 layers of product
	750ml Bottle	495	440	4	5	5	25		
		555	440	4	6	5	30	220	Maximum load based on 2 layers of product
	355ml Can	495	440	4	7	6	42		
		555	440	4	8	6	48	900	Maximum load based on 2 layers of product (Max. of 5 layer)
	330ml Bottle	495	440	4	8	7	56		
		555	440	4	9	7	63	714	Maximum load based on 3 layers of product

Please note this is a guide only. Number of shelves may need to be added or removed to accommodate the total amount of product type.



Ideal for



Restaurants & cafes



Clubs, pubs & bars



Quick service restaurants



Venues

Australia

Freephone 1800 121 535

Facsimile 1800 121 533

Email enquiry@skope.com.au**New Zealand**

0800 947 5673

+64 (3) 983 3896

enquiry@skope.co.nz

For SKOPE terms and conditions of sale visit skope.com

© 2016 SKOPE Industries Ltd. All rights reserved.

® SKOPE and the SKOPE logo are registered trade marks of SKOPE Industries Ltd.

BackBar X and the BackBar X logo are trademarks of SKOPE Industries Ltd.

SKOPE Industries Ltd. Reserves the right to alter specifications without notice.

Visit skope.com for the most recent specifications.

CENTAUR SERIES

Standard Range

Food Service / Pizza and Sandwich

The Centaur series has been designed with a heavy duty construction to meet the demands of busy kitchens, cafes and pizza establishments. These energy and cost efficient cabinets ensure you get a reliable product at a great price.




Warranty
2 year protection


Specifications

Centaur Series


Food Service / Pizza and Sandwich

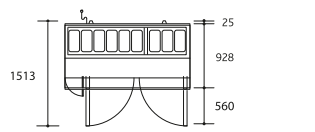


Integral top view




Integral front elevation




Integral top view




Integral front elevation




Integral top view




Integral front elevation




Integral top view



Integral front elevation



Integral top view



Integral front elevation

BC180-P - PIZZA

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume
BC180-P-2RRROS-E	182	Integral	Chiller	597 litres
				Total Shelf Area
				1.76m ² (excluding floor)
				Floor Area
				1.74m ²

- 2 adjustable shelves per door as standard
- Supplied with 9 pans (w176 x d325 x h150) as standard
- Depth of 795mm can be achieved by removing the cutting board, benchtop and rear spacer
- 0°C to +4°C for up to 4 hours in 30°C ambient (with pan lids raised)
- Minimum 150mm clear ventilation space required

BC180-P
2 DOOR

BC240-P - PIZZA

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume
BC240-P-3RRRS-E	270	Integral	Chiller	733 litres
				Total Shelf Area
				1.39m ² (excluding floor)
				Floor Area
				2.33m ²

- 1 adjustable shelf per door as standard
- Supplied with 12 pans (w176 x d325 x h150) as standard
- Depth of 795mm can be achieved by removing the cutting board, benchtop and rear spacer
- 0°C to +4°C for up to 4 hours in 30°C ambient (with pan lids raised)
- Minimum 150mm clear ventilation space required

BC240-P
3 DOOR

BC240-PS - PIZZA

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume
BC240-PS-22RRRS-E	270	Integral	Chiller	733 litres
				Total Shelf Area
				0.92m ² (excluding floor)
				Floor Area
				2.33m ²

- 1 adjustable shelf per door as standard
- Supplied with 12 pans (w176 x d325 x h150) as standard
- 0°C to +4°C for up to 4 hours in 30°C ambient (with pan lids raised)
- Minimum 150mm clear ventilation space required

BC240-PS
2 DOOR - 2 DRAWER

BC120-S - SANDWICH

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume
BC120-S-2RRROS-E	110	Integral	Chiller	275 litres
				Total Shelf Area
				0.44m ² (excluding floor)
				Floor Area
				0.87m ²

- 1 adjustable shelf per door as standard
- Supplied with 6 pans (w176 x d325 x h150) as standard
- 0°C to +4°C for up to 4 hours in 30°C ambient (with pan lids raised)
- Minimum 150mm clear ventilation space required

BC120-S
2 DOOR

BC180-S - SANDWICH

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume
BC180-S-3RRRS-E	153	Integral	Chiller	469 litres
				Total Shelf Area
				0.76m ² (excluding floor)
				Floor Area
				1.26m ²

- 1 adjustable shelf per door as standard
- Supplied with 9 pans (w176 x d325 x h150) as standard
- 0°C to +4°C for up to 4 hours in 30°C ambient (with pan lids raised)
- Minimum 150mm clear ventilation space required

BC180-S
3 DOOR

*Height includes adjustable legs. Height 100mm - 160mm **Depth includes 25mm rear spacer and includes removable cutting board



CENTAUR SERIES

Standard Range

Food Service / Under Counter

Designed with a heavy duty construction these chillers and freezers meet the demands of busy commercial kitchens and food service operations.

Options
Available in glass or solid doors
(excluding BC070 & BC180-CS)




Warranty
2 year protection


Specifications

Centaur Series


Food Service / Under Counter



Integral top view




Integral front elevation




Integral top view




Integral front elevation




Integral top view



Integral front elevation

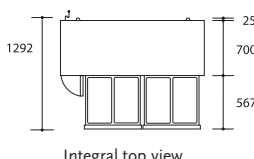

Integral top view



Integral front elevation

BC070 - SOLID DOOR

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume 149 litres Floor Area 0.51m ²
BC070-CB-1RooS-E	78	Integral	Chiller	
		External (mm)	Internal (mm)	
Height*		860	560	
Width		700	600	
Depth**		725	530	

- 2 adjustable shelves per door as standard
- 1°C to +4°C in 38°C ambient
- Minimum 150mm clear ventilation space required at the side and rear of the cabinet

BC070
1 DOOR

BC120 - SOLID/GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume 275 litres Floor Area 0.87m ²
BC120-C-2RRROS-E	105	Integral	Chiller	
BC120-C-2FFOS-E	105	Integral	Freezer	
BC120-CG-2RRROS-E (glass)	105	Integral	Chiller	
		External (mm)	Internal (mm)	
Height*		840	610	
Width		1200	850	
Depth**		725	530	

- BC120-CG - 16.19 MEPS (kWh/24h/m²)
- 1 adjustable shelf per door as standard
- +1°C to +4°C in 38°C ambient (solid door chiller only)
- -18°C to -23°C in 38°C ambient (solid door freezer only)
- +1°C to +4°C in 32°C ambient (glass door chiller only)
- Minimum 150mm clear ventilation space required at the sides and rear of the cabinet

BC120
2 DOOR

BC180 - SOLID/GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume 469 litres Floor Area 1.30m ²
BC180-C-3RRRS-E	148	Integral	Chiller	
BC180-CG-3RRRS-E (glass)	148	Integral	Chiller	
		External (mm)	Internal (mm)	
Height*		840	610	
Width		1800	1450	
Depth**		725	530	

- BC180-CG - 14.38 MEPS (kWh/24h/m²)
- 1 adjustable shelf per door as standard
- +1°C to +4°C in 32°C ambient (glass door only)
- +1°C to +4°C in 38°C ambient (solid door only)
- Minimum 150mm clear ventilation space required at the sides and rear of the cabinet

BC180
3 DOOR

BC180-CS - 6 DRAWER

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume 469 litres Floor Area 1.31m ²
BC180-CS-6RROS-E	168	Integral	Chiller	
		External (mm)	Internal (mm)	
Height*		840	610	
Width		1800	1450	
Depth**		725	530	

- 1°C to +4°C in 38°C ambient
- Pans/trays not included
- Minimum 150mm clear ventilation space required at the sides and rear of the cabinet

BC180-CS
6 DRAWER

*Height includes adjustable legs. Height 100mm - 160mm ** Depth includes 25mm spacer

COUNTER LINE SERIES

SKOPE[®]

Standard Range

Display / Under Counter

Available in a range of depths, doors and installation heights, making this series ideal for restaurants, commercial kitchens and foodservice areas with non-gastronom chiller requirements.

Options

R/H Services
S/S Countertop
Additional shelves
Door lock kit

Double Low/E Argon
Heated glass (swing door only)
Sliding doors



Warranty
2 year protection




High Energy Efficiency

High Energy Efficiency models available

Specifications


Counterline Series

Display / Under Counter




Integral front elevation

1600




Remote front elevation

1455




Integral front elevation

2210




Remote front elevation

2065




Integral front elevation

2820




Remote front elevation

2675



Integral front elevation

1600




Remote front elevation

1455




Integral front elevation

2210




Remote front elevation

2065



Integral front elevation

2820



Remote front elevation

2675

CL400- SOLID/GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume 390 litres Total Shelf Area 1.74m ² (including floor) Floor Area 1.09m ² (integral) 0.99m ² (remote)
CL400	127	Integral	Chiller	
CL400r	112	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*	725	725	545**	
Width	1600	1455	1120	
Depth***	680	680	565	

CL400
2 DOOR

- 12.75 MEPS (kWh/24hr/m²)
- Remote refrigeration duty 480 Watts at -5°C SST

CL600 -SOLID/GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume 600 litres Total Shelf Area 2.70m ² (including floor) Floor Area 1.50m ² (integral) 1.40m ² (remote)
CL600	140	Integral	Chiller	
CL600r	125	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*	725	725	545**	
Width	2210	2065	1730	
Depth***	680	680	565	



CL600
3 DOOR

- 11.65 MEPS (kWh/24hr/m²)
- Remote refrigeration duty 615 Watts at -5°C SST

CL800 -SOLID/GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume 810 litres Total Shelf Area 3.66m ² (including floor) Floor Area 1.92m ² (integral) 1.80m ² (remote)
CL800	153	Integral	Chiller	
CL800r	138	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*	725	725	545**	
Width	2820	2675	2340	
Depth***	680	680	565	



CL800
4 DOOR

- 8.74 MEPS (kWh/24hr/m²)
- Remote refrigeration duty 850 Watts at -5°C SST

CC300 - SOLID/GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume 335 litres Total Shelf Area 1.48m ² (including floor) Floor Area 0.96m ² (integral) 0.87m ² (remote)
CC300	122	Integral	Chiller	
CC300r	107	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*	725	725	545**	
Width	1600	1455	1120	
Depth***	600	600	485	

CC300
2 DOOR

- 11.65 MEPS (kWh/24hr/m²)
- Remote refrigeration duty 400 Watts at -5°C SST

CC500 - SOLID/GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume 517 litres Total Shelf Area 2.29m ² (including floor) Floor Area 1.33m ² (integral) 1.24m ² (remote)
CC500	135	Integral	Chiller	
CC500r	120	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*	725	725	545**	
Width	2210	2065	1730	
Depth***	600	600	485	



CC500
3 DOOR

- 9.83 MEPS (kWh/24hr/m²)
- Remote refrigeration duty 540 Watts at -5°C SST

CC700 -SOLID/GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume 700 litres Total Shelf Area 3.11m ² (including floor) Floor Area 1.70m ² (integral) 1.60m ² (remote)
CC700	148	Integral	Chiller	
CC700r	133	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*	725	725	545**	
Width	2820	2675	2340	
Depth***	600	600	485	

CC700
4 DOOR

- 9.75 MEPS (kWh/24hr/m²)
- Remote refrigeration duty 660 Watts at -5°C SST

*Height excludes castors (115 - 180mm) , legs (150 - 180mm) or optional countertop (20mm) **Smallest available internal height ***Depth excludes optional countertop (20mm)

GLASS CHILLER SERIES

Standard Range

Display / Beverage

This remote Glass Chiller supports efficient bar service by quickly chilling glasses straight from the dishwasher ensuring glasses are consistently cold.

Options
R/H Services (L/H Services standard)



Note: The SKOPE Chiller does not include glass racks or glasses




Warranty
2 year protection

Specifications

Glass Chiller Series

Display Beverage

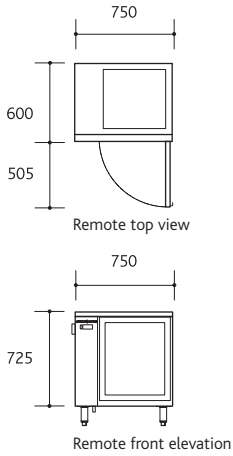

GC110 - GLASS DOOR

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	
GC110r	55	Remote	Chiller	
		External (mm)	Internal (mm)	
Height*		725	660	Gross Volume 110 litres
Width**		750	370	Floor Area 0.45m ²
Depth		600	455	Top Opening w480 x d455mm

- Remote refrigeration duty 450 Watts at -5°C SST
- +1°C to +4°C in 40°C ambient
- Fits 3 14" x 17" glass racks

GC110
1 DOOR

*Height excludes adjustable legs (150-180mm) **Width excludes remote connections (approximately 70mm)

PEGASUS SERIES

SKOPE®

Premium Range

Food Service / 1/1 Under Counter

This gastronorm series has a front breathing system, enabling them to be built flush against back & side walls making the most of valuable space.

Options

R/H Services

S/S Countertop (pictured)

2 Drawers per door

3 Drawers per door

Extra shelf & slides

Plinth mounting (pictured)




Warranty
2 year protection

PSF0004

Specifications

Pegasus Series

Food Service / 1/1 Under Counter

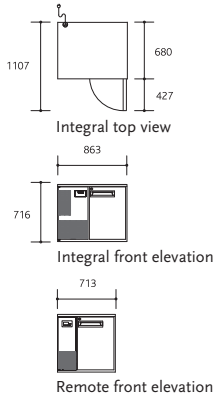


PG100HC-2 / PG100HF-2 - 1/1 GASTRONORM TRAYS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer		
PG100HC-2	115	Integral	Chiller	Gross Volume 110 litres (3.96ft ³) Total Shelf Area 0.31 m ² (excludes floor) Floor Area 0.58m ² (integral) 0.48m ² (remote)	
PG100HCr-2	100	Remote	Chiller		
PG100HF-2	130	Integral	Freezer		
PG100HFr-2	100	Remote	Freezer		
		Integral External (mm)	Remote External (mm)	Internal (mm)	
Height*		716	716	570	
Width		863	713	365	
Depth		680	680	538	

- Chiller remote refrigeration duty 210 Watts at -5°C SST
- Freezer remote refrigeration duty 230 Watts at -30°C SST
- +1°C to +4°C in 43°C ambient (chiller only)
- -18°C to -21°C in 43°C ambient (freezer only)

PG100HC-2 / PG100HF-2
1 DOOR

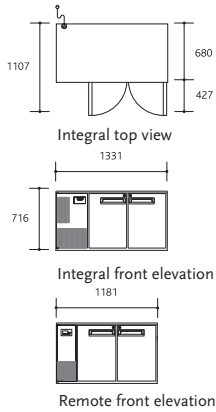


PG250HC-2 / PG250HF-2 - 1/1 GASTRONORM TRAYS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer		
PG250HC-2	130	Integral	Chiller	Gross Volume 260 litres (9ft ³) Total Shelf Area 0.63 m ² (excludes floor) Floor Area 0.90m ² (integral) 0.80m ² (remote)	
PG250HCr-2	115	Remote	Chiller		
PG250HF-2	145	Integral	Freezer		
PG250HFr-2	115	Remote	Freezer		
		Integral External (mm)	Remote External (mm)	Internal (mm)	
Height*		716	716	570	
Width		1331	1181	833	
Depth		680	680	538	

- Chiller remote refrigeration duty 360 Watts at -5°C SST
- Freezer remote refrigeration duty 385 Watts at -30°C SST
- +1°C to +4°C in 43°C ambient (chiller only)
- -18°C to -21°C in 43°C ambient (freezer only)

PG250HC-2 / PG250HF-2
2 DOOR

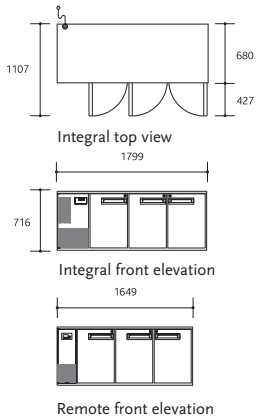


PG400HC-2 / PG400HF-2- 1/1 GASTRONORM TRAYS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer		
PG400HC-2	145	Integral	Chiller	Gross Volume 410 litres (14ft ³) Total Shelf Area 0.94 m ² (excludes floor) Floor Area 1.22m ² (integral) 1.12 m ² (remote)	
PG400HCr-2	130	Remote	Chiller		
PG400HF-2	160	Integral	Freezer		
PG400HFr-2	130	Remote	Freezer		
		Integral External (mm)	Remote External (mm)	Internal (mm)	
Height*		716	716	570	
Width		1799	1649	1301	
Depth		680	680	538	

- Chiller remote refrigeration duty 485 Watts at -5°C SST
- Freezer remote refrigeration duty 550 Watts at -30°C SST
- +1°C to +4°C in 43°C ambient (chiller only)
- -18°C to -21°C in 43°C ambient (freezer only)

PG400HC-2 / PG400HF-2
3 DOOR

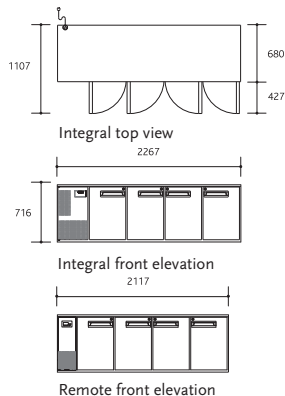

PG550HC-2 - 1/1 GASTRONORM TRAYS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer		
PG550HC-2	160	Integral	Chiller	Gross Volume 560 litres (19.1ft ³) Total Shelf Area 1.25 m ² (excludes floor) Floor Area 1.54m ² (integral) 1.44m ² (remote)	
PG550HCr-2	145	Remote	Chiller		
		Integral External (mm)	Remote External (mm)		Internal (mm)
Height*		716	716		570
Width		2267	2117	1769	
Depth		680	680	538	

- Chiller remote refrigeration duty 630 Watts at -5°C SST
- +1°C to +4°C in 43°C ambient (chiller only)

PG550HC-2
4 DOOR

*Height excludes countertop and legs or adjustable castors (115-130mm)

PEGASUS SERIES

SKOPE®

Premium Range

Food Service / 2/1 Under Counter

Designed to be dependable, this series incorporates 2/1 standard gastronorm tray and shelf width/depth dimensions and door locks as standard.

Options

R/H Services

S/S Countertop (pictured)

2 Drawers per door

3 Drawers per door

Extra shelf & slides

Plinth mounting





Warranty
2 year protection

PSF0005

Specifications

Pegasus Series

Food Service / 2/1 Under Counter





PG200HC / PG200HF - 2/1 GASTRONORM TRAYS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume 210 litres (7.42ft ³) Total Shelf Area 0.64m ² (excluding floor) Floor Area 0.88m ² (integral) 0.88m ² (remote)
PG200HC	120	Integral	Chiller	
PG200HCr	105	Remote	Chiller	
PG200HF	132	Integral	Freezer	
PG200HFr	108	Remote	Freezer	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*		771	771	565
Width		1065	1065	650
Depth		828	828	650

- Chiller remote refrigeration duty 360 Watts at -5°C SST
- Freezer remote refrigeration duty 385 Watts at -30°C SST
- +1°C to +4°C in 43°C ambient (chiller only)
- -18°C to -21°C in 43°C ambient (freezer only)

PG200HC / PG200HF
1 DOOR


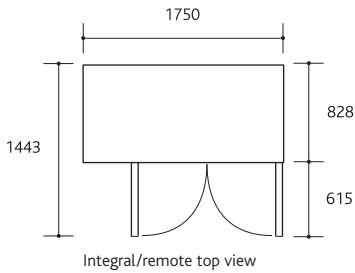


PG500HC / PG500HF - 2/1 GASTRONORM TRAYS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume 459 litres (16.20ft ³) Total Shelf Area 1.27m ² (excluding floor) Floor Area 1.45m ² (integral) 1.45m ² (remote)
PG500HC	135	Integral	Chiller	
PG500HCr	120	Remote	Chiller	
PG500HF	147	Integral	Freezer	
PG500HFr	123	Remote	Freezer	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*		771	771	565
Width		1750	1750	1250
Depth		828	828	650

- Chiller remote refrigeration duty 485 Watts at -5°C SST
- Freezer remote refrigeration duty 550 Watts at -30°C SST
- +1°C to +4°C in 43°C ambient (chiller only)
- -18°C to -21°C in 43°C ambient (freezer only)

PG500HC / PG500HF
2 DOOR

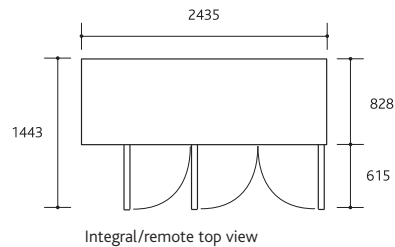

PG800HC - 2/1 GASTRONORM TRAYS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume 711 litres (25.10ft ³) Total Shelf Area 1.91m ² (excluding floor) Floor Area 2.02m ² (integral) 2.02m ² (remote)
PG800HC	150	Integral	Chiller	
PG800HCr	135	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*		771	771	565
Width		2435	2435	1935
Depth		828	828	650

- Chiller remote refrigeration duty 630 Watts at -5°C SST
- +1°C to +4°C in 43°C ambient (chiller only)

PG800HC
3 DOOR

*Height includes optional 52mm countertop and 34mm Plinth. Excludes castors and adjustable legs.

PEGASUS SERIES



Premium Range

Food Service / Lowlines

Chillers designed with a superior heat resistant countertop so hot cooking equipment can be safely placed on top.

Options
R/H Services
Plinth mounting (pictured)




Warranty
2 year protection


Specifications

Pegasus Series


Food Service / Lowlines



Remote top view



Integral front elevation




Remote front elevation

PGLL150 / PGLL150r - 1/1 & 2/1 GASTRONORM TRAYS


Model	Weight (kg)	Integral/Remote	Chiller/Freezer		
PGLL150	95	Integral	Chiller	Gross Volume 150 litres (5.3ft ³) Floor Area 1.05m ² (integral) 0.84 m ² (remote)	
PGLL150r	85	Remote	Chiller		
		Integral External (mm)	Remote External (mm)	Internal (mm)	
Height*		520	520	370	
Width		1500	1200	700	
Depth		700	700	555	

- Two refrigerated S/S drawers with individual key locks (W 638mm x D 508mm x H 109mm)
- Each drawer fits 2 x 1/1 pans 100mm deep
- Remote refrigeration duty 300 Watts at -5° SST
- +1°C to +4°C in 40°C ambient

PGLL150 / PGLL150r
2 DRAWER



Remote top view

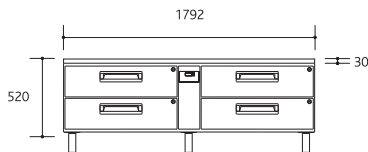

Remote front elevation

PGLL300r - 1/1 & 2/1 GASTRONORM TRAYS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	
PGLL300r	115	Remote	Chiller	Gross Volume 300 litres (10.6ft ³) Floor Area 1.26m ² (remote)
		Remote External (mm)	Internal (mm)	
Height*		520	370	
Width		1792	2 x 700	
Depth		700	555	

- Four refrigerated S/S drawers with individual key locks (W 638mm x D 508mm x H 109mm)
- Each drawer fits 2 x 1/1 pans 100mm deep
- Remote refrigeration duty 372 Watts at -5° SST
- +1°C to +4°C in 40°C ambient

PGLL300r
4 DRAWER

*Height includes countertop, and excludes legs (150-180mm) NB: Adjustable castors option available on integral model only

PEGASUS SERIES

SKOPE®

Premium Range

Food Service / 2/1 Pizza

These horizontal pizza cabinets have been specifically designed for pizza establishments, providing quick access to fresh ingredients and space to prepare food.

Options

Extra shelf & slides
Racks & trays
1/6 pans & dividers

Removable
insulated night lid





Warranty
2 year protection

PSF0006

Specifications

Pegasus Series

Food Service / 2/1 Pizza





PG500Pizza - 2/1 GASTRONORM TRAYS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	
PG500Pizza	145	Integral	Chiller	Gross Volume 459 litres (16.2ft ³) Total Shelf Area 1.27m ² (excludes floor) Floor Area 1.45m ²
PG500Pizzar	130	Remote	Chiller	
		Integral	Remote	
		External (mm)	External (mm)	Internal (mm)
Height*	900	900	565	
Width	1750	1750	1250	
Depth	830	830	650	

- Supplied with 9 of 1/3 pans (2 ambient 65mm deep pans & 7 chilled 150mm deep pans)
- Remote refrigeration duty 706 Watts at -10°C SST
- +1°C to +5°C in 30°C ambient (lids off for maximum 4 hours)

PG500Pizza
2 DOOR

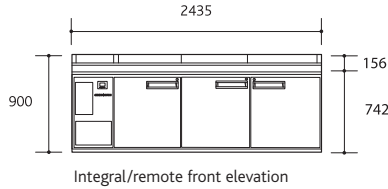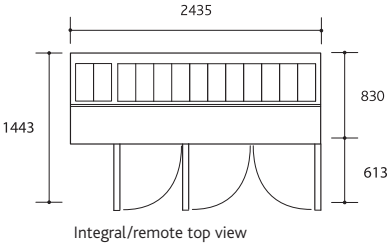

PG800Pizza - 2/1 GASTRONORM TRAYS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	
PG800Pizza	160	Integral	Chiller	Gross Volume 711 litres (25.1ft ³) Total Shelf Area 1.91m ² (excludes floor) Floor Area 2.02m ²
PG800Pizzar	145	Remote	Chiller	
		Integral	Remote	
		External (mm)	External (mm)	Internal (mm)
Height*	900	900	565	
Width	2435	2435	1935	
Depth	830	830	650	

- Supplied with 13 of 1/3 pans (2 ambient 65mm deep pans & 11 chilled 150mm deep pans)
- Remote refrigeration duty 706 Watts at -10°C SST
- +1°C to +5°C in 30°C ambient (lids off for maximum 4 hours)

PG800Pizza
3 DOOR

*Height includes pizza countertop and optional 34mm Plinth. Excludes castors and adjustable legs.

PEGASUS SERIES

SKOPE®

Premium Range

Food Service / 1/1 Preparation

The horizontal preparation chillers have been designed to blow chilled air over the pots and ensure consistent temperatures are maintained.

Options

R/H Services
Extra shelf & slides
2 drawers per door

1/6 pans & dividers
Plinth mounting
(pictured)




Warranty
2 year protection

PSF0002


Specifications

Pegasus Series


Food Service / 1/1 Preparation




Integral top view




Integral front elevation




Remote front elevation

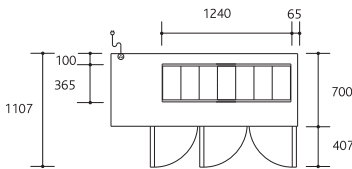


Integral top view




Remote front elevation




Remote front elevation

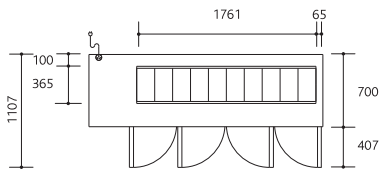

Integral top view



Integral front elevation



Remote front elevation

PG250Prep-2 - 1/1 GASTRONORM TRAYS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume 255 litres (9.0ft ³) Total Shelf Area 0.63m ² (excludes base) Floor Area 0.93m ² (integral) 0.83m ² (remote)
PG250Prep-2	160	Integral	Chiller	
PG250Prepr-2	130	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*		751	751	570
Width		1331	1181	833
Depth		700	700	538

- Worktop accepts 4 of 1/3 150mm deep pans or 8 of 1/6 150mm deep pans
- Supplied with 4 of 1/3 150mm deep pans
- Remote refrigeration duty 500 Watts at -10°C SST
- +1°C to +5°C in 30°C ambient (lids off for maximum of 4 hours)

PG250Prep-2
2 DOOR

PG400Prep-2 - 1/1 GASTRONORM TRAYS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume 399 litres (14.0ft ³) Total Shelf Area 0.94m ² (excludes base) Floor Area 1.26m ² (integral) 1.15m ² (remote)
PG400Prep-2	175	Integral	Chiller	
PG400Prepr-2	145	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*		751	751	570
Width		1799	1649	1301
Depth		700	700	538

- Worktop accepts 7 of 1/3 150mm deep pans or 14 of 1/6 150mm deep pans
- Supplied with 7 of 1/3 150mm deep pans
- Remote refrigeration duty 706 Watts at -10°C SST
- +1°C to +5°C in 30°C ambient (lids off for maximum 4 hours)

PG400Prep-2
3 DOOR

PG550Prep-2 - 1/1 GASTRONORM TRAYS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	Gross Volume 542 litres (19.1ft ³) Total Shelf Area 1.25m ² (excludes base) Floor Area 1.59m ² (integral) 1.48m ² (remote)
PG550Prep-2	175	Integral	Chiller	
PG550Prepr-2	160	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*		751	751	570
Width		2267	2117	1769
Depth		700	700	538

- Worktop accepts 10 of 1/3 150mm deep pans or 20 of 1/6 150mm deep pans
- Supplied with 10 of 1/3 150mm deep pans
- Remote refrigeration duty 706 Watts at -10°C SST
- +1°C to +5°C in 30°C ambient (lids off for maximum 4 hours)

PG550Prep-2
4 DOOR

*Height excludes legs (150-180mm) or adjustable castors (115-130mm)

PEGASUS SERIES

SKOPE[®]

Premium Range

Food Service / 2/1 Preparation

These horizontal preparation chillers have been designed to blow chilled air over the pots and ensure consistent temperatures are maintained.

Options

R/H Services
Extra shelf & slides
1/6 pans & dividers

Removable insulated
night lid (pictured)



Warranty
2 year protection


PSF0003

Specifications


Pegasus Series

Food Service / 2/1 Preparation

SKOPE®

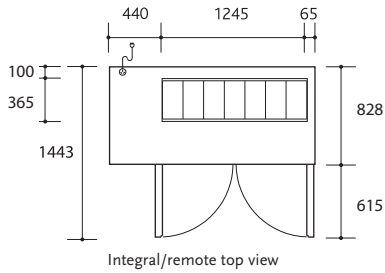

Integral/remote top view

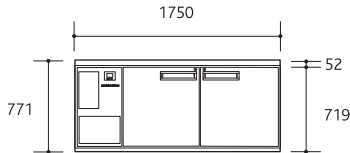


Integral/remote front elevation

PG500Prep - 2/1 GASTRONORM TRAYS


Model	Weight (kg)	Integral/Remote	Chiller/Freezer	
PG500Prep	135	Integral	Chiller	Gross Volume 480 litres (16.2ft ³) Total Shelf Area 1.27m ² (excludes floor) Floor Area 1.45m ²
PG500Prepr	135	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*		771	771	495
Width		1750	1750	1250
Depth		828	828	650

- Prep worktop supplied with 7 of 1/3 pans 150mm deep
- Remote refrigeration duty 706 Watts at -10°C SST
- +1°C to +5°C in 30°C ambient (lids off for maximum 4 hours)

PG500Prep
2 DOOR

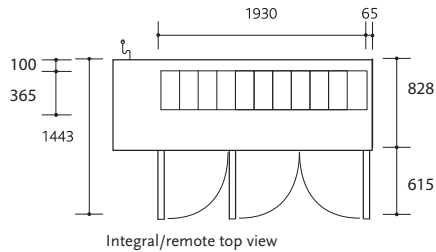

Integral/remote top view

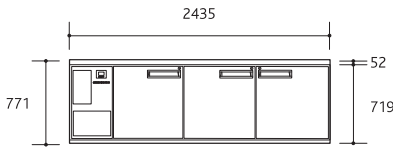

Integral/remote front elevation

PG800Prep - 2/1 GASTRONORM TRAYS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	
PG800Prep	150	Integral	Chiller	Gross Volume 750 litres (25.1ft ³) Total Shelf Area 1.91 m ² (excludes floor) Floor Area 2.02m ²
PG800Prepr	150	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*		771	771	565
Width		2435	2435	1935
Depth		828	828	650

- Prep worktop supplied with 11 of 1/3 pans 150mm deep
- Remote refrigeration duty 706 Watts at -10°C SST
- +1°C to +5°C in 30°C ambient (lids off for maximum 4 hours)

PG800Prep
3 DOOR

*Height includes 52mm countertop and optional 34mm Plinth. Plinth removed when castors are fitted.